



OGA DIAGONAL: 13.25 [336.55]
VA DIAGONAL: 12.48 [316.94]
PA DIAGONAL: 11.78 [299.24]

ESD CLAMSHELL
CASE
IS USED WITH ALL
USB AND SER
TERMINATIONS.



(HID M) EXII-7730HC
98-0003-2813-2
HID CONTROLLER
SOLDER SIDE

(USB R) EXII-7760UC
98-0003-2814-0
USB CONTROLLER
SOLDER SIDE

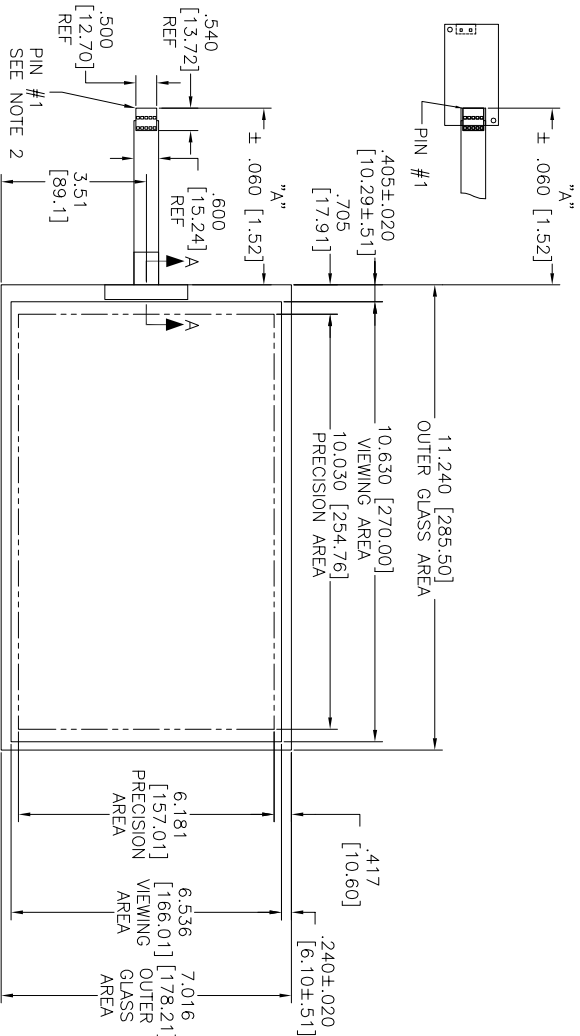

TOP LEVEL NUMBER	US NUMBER	TYPE	DM "A" (TOTAL GLASS TO CONNECTOR)	A/G FINISH	PROD SPEC
17-8751-205	98-0003-3121-9	FFC	8.00 [203.20]	AG500	23655
17-8751-226	98-0003-3122-7	USB R	8.00 [203.20]	AG500	23655
N/A	98-0003-3205-0	HID M	8.00 [203.20]	AG500	23655

NOTES:

1. WEIGHT OF GLASS IN GRAMS: 368±10%
2. NICOMATIC HOUSING P/N: OLOS
3. NICOMATIC RECEPTACLES (PINS) MATTE TIN PLATED P/N: 14106-12
4. HOUSING ORIENTED WITH LATCH DOWN

PINOUT	1	2	3	4	5
LR	LR	LL	SHLD	UL	UR

UNITS	INCHES [MM]
TOLERANCES UNLESS OTHERWISE SPECIFIED	
X .XX	± .03 [.76]
.XXX	± .015 [.38]
ANGLES	± 1°



MARKETING DRAWING
SCT32NN 12.48" W

REV	DATE	BY	CHK
F	4/13	SB	
E	2/12	SB	
D	9/11	SB	
C	03/457		

DO NOT SCALE DRAWING	SCALE
1 = 1	

SIZE	DOCUMENT NO.	SHEET	REV
C	36087-MKT	1 OF 1	F