

OGA DIAGONAL: 11.62 [295.18]
VA DIAGONAL: 10.84 [275.46]
PA DIAGONAL: 10.25 [260.26]


ESD CLAMSHELL CASE
IS USED WITH ALL USB
AND SER
TERMINATIONS.



(SER)
EXII-7720SC
98-0003-2217-6
SERIAL CONTROLLER
SOLDER SIDE

(USB R)

EXII-7760UC
98-0003-2814-0
USB CONTROLLER
SOLDER SIDE

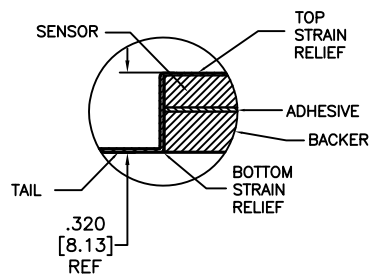

SECTION A-A
SCALE: NONE

(FFC)

PIN #1
SEE NOTE 2

"A"
 $\pm .060$ [1.52]

.405 $\pm$.020
[10.29 $\pm$.51]

.645
[16.38]

"A"
 $\pm .060$ [1.52]

"A"
 $\pm .060$ [1.52]

.500
[12.70]
REF

.540
[13.72]
REF

.600
[15.24]
REF

TOP LEVEL NUMBER	TYPE	DIM "A" (TOTAL GLASS TO CONNECTOR)	A/G FINISH	PRODUCT SPEC
98-0003-3132-6	FFC	8.00" [203.20]	AG500	36235
98-0003-3133-4	SER	8.00" [203.20]	AG500	36235
98-0003-3134-2	USB R	8.00" [203.20]	AG500	36235

9.200 $\pm$.030 [233.68 $\pm$ 0.76]
OUTER GLASS AREA

8.580 [217.94]
VIEWING AREA

8.100 [205.74]
PRECISION AREA

.425
[10.80]

.245 $\pm$.020
[6.22 $\pm$.51]

6.10
[154.9]

6.250
[158.75]
PRECISION
AREA

6.610
[167.90]
VIEWING
AREA

7.100 $\pm$.030
[180.34 $\pm$ 0.76]
OUTER GLASS
AREA

.298 $\pm$.023 [7.57 $\pm$.58]
SENSOR, ADHESIVE
AND BACKER

.320 $\pm$.033 [8.13 $\pm$.84]
TOTAL THICKNESS
OF GLASS, CABLE
AND STRAIN RELIEF

NOTES:

- WEIGHT OF GLASS IN GRAMS: 756 $\pm$ 10%
- 5 PIN AMP CONNECTOR LATCH STYLE HOUSING P/N: 487526-4 TIN CONTACTS P/N: 2-487406-4 HOUSING ORIENTED WITH LATCH DOWN

PINOUT	
1	LR
2	LL
3	SHLD
4	UL
5	UR

UNITS INCHES [MM]

TOLERANCES
UNLESS OTHERWISE SPECIFIED
.X $\pm$
.XX $\pm .03$ [.76]
.XXX $\pm .015$ [.38]
ANGLES $\pm 1^\circ$



DO NOT SCALE DRAWING

SCALE 1 = 1



3M TOUCH SYSTEMS
METHUEN, MA
USA
© COPYRIGHT 2005
THIS DOCUMENT IS COPYRIGHTED PROPERTY OF THE
3M COMPANY AND MAY NOT BE REPRODUCED
WITHOUT 3M WRITTEN PERMISSION OR USED OR
DISCLOSED FOR OTHER THAN 3M AUTHORIZED
PURPOSES.

DRAWN MTD 1/13/09

02	REVISE PER CO 030448	5/09	SB
01	INITIAL RELEASE PER CO 029886	1/09	MTD
REV	CHANGE NOTICE	DATE	DRW
TITLE			
MARKETING DRAWING SCT76NN 10.84"			
CWD FORMAT AUTOCAD		SHEET 1 OF 1	
SIZE C	DOCUMENT NO. 36463-MKT	REV 02	