



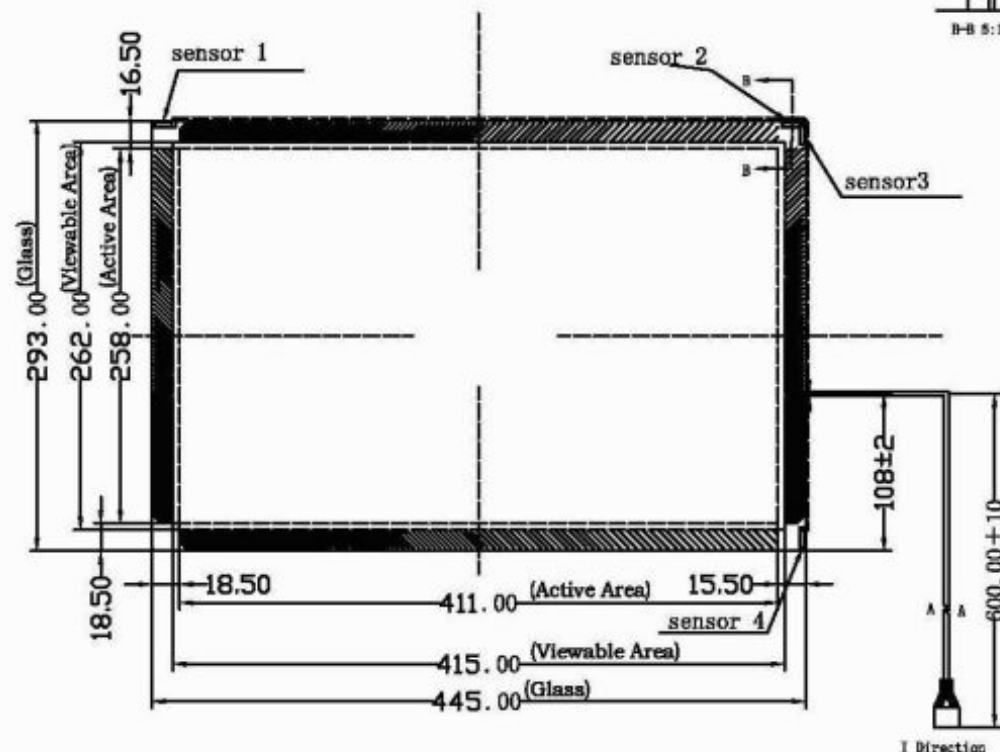


Edition	Modify	Date	Author

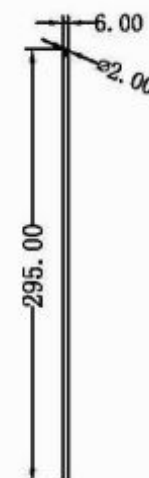



I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Overall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit



产品要求:

1. 线卡: 直线卡
2. 换能器不可超过屏体表面
3. 基座: 发射15.5mm, 接收11.5mm
4. 粘线方式: 侧面



I Direction

EVERISE INT'L LIMITED

Model: ETS06B0190-AL2