



UTC-510 Product Sales kit


2015-Q3

UCD
Karen Tu


TOUCH PANEL

capacitive-type

Ubiquitous Touch Computer

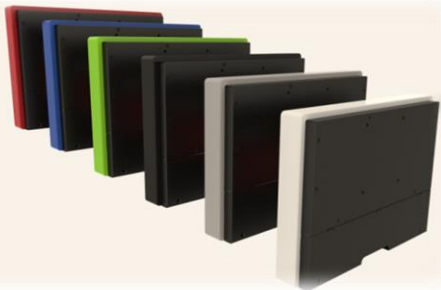


What's NEW for UTC-510

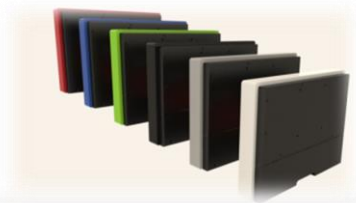

WHAT'S NEW

Stand Alone View of UTC-510

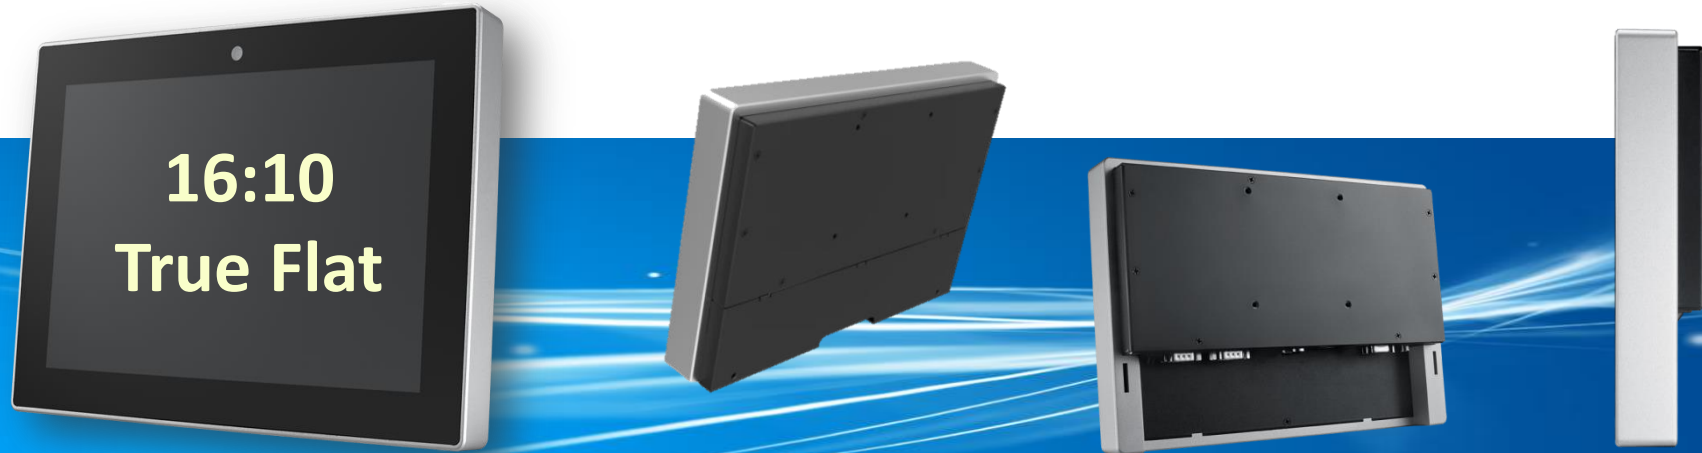


Product Overview

Dimensions (WxHxD) 265.4 x 182.4 x 39.55 mm



Silver

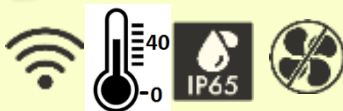

Is design for...

POWERFUL

CAPABLE

STABLE

FLEXIBLE


DURABLE

MODIFIABLE

Panel mount View of UTC-510



Rear IO Overview

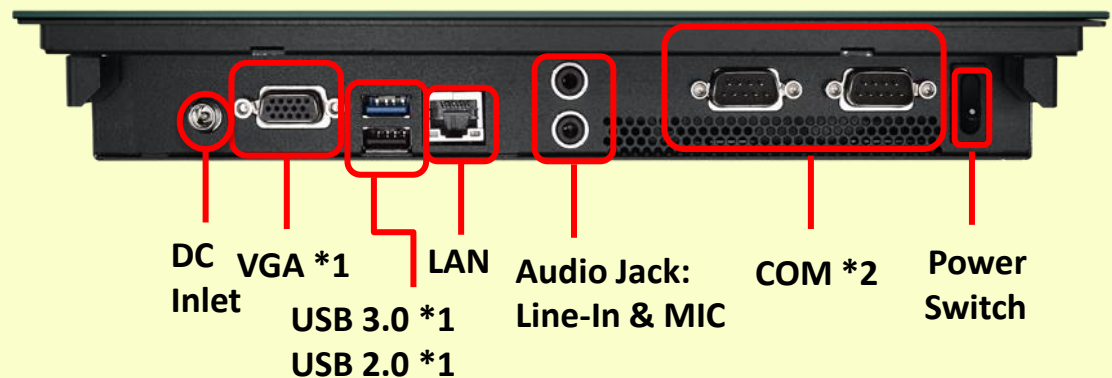

Panel mount View of UTC-510

4.8mm



**Only the Glass (No Bezel)
revealed out of the Wall**



Application Scenarios



UTC-510 for Meeting Room Management

conference
room



Meeting Room Management

UTC-510 for Smart Home Application



Home Security/Monitoring

UTC-510 for Attendance system



Easy and convenient for management of attendance

Attendance Management



UTC-510 for Human-Machine interface



SMART BUILDING 

Equipment Control

Temperature Control

Monitoring / Security

Self-Service Kiosk



UTC-510 for Queuing Management



Supermarket self check in/out


UTC-510 for Retail / Hospitality

Customer Feedback Survey


Self-Ordering

Service Rating

Price Checker

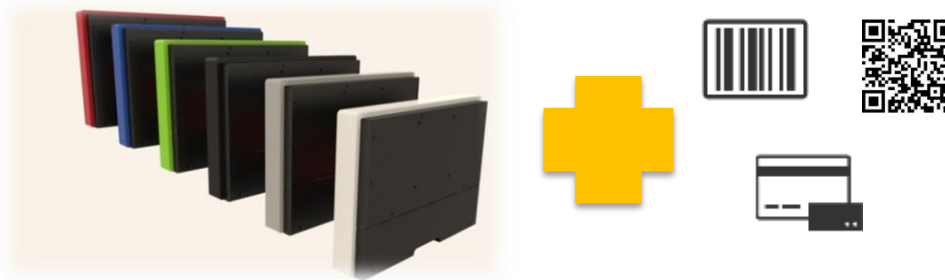

**Service is Just
"One-Touch" Away**

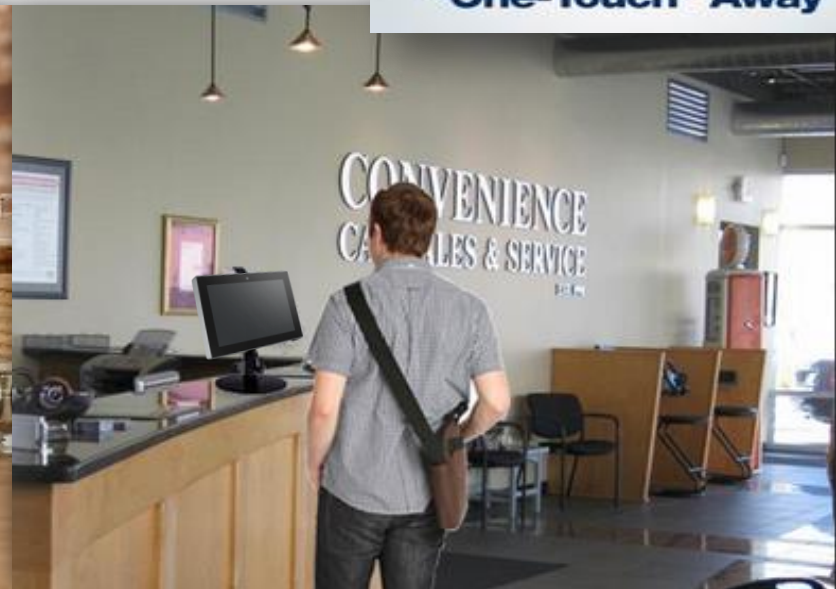


Coming soon.....

Peripherals for UTC-510



Exploded View of UTC-510

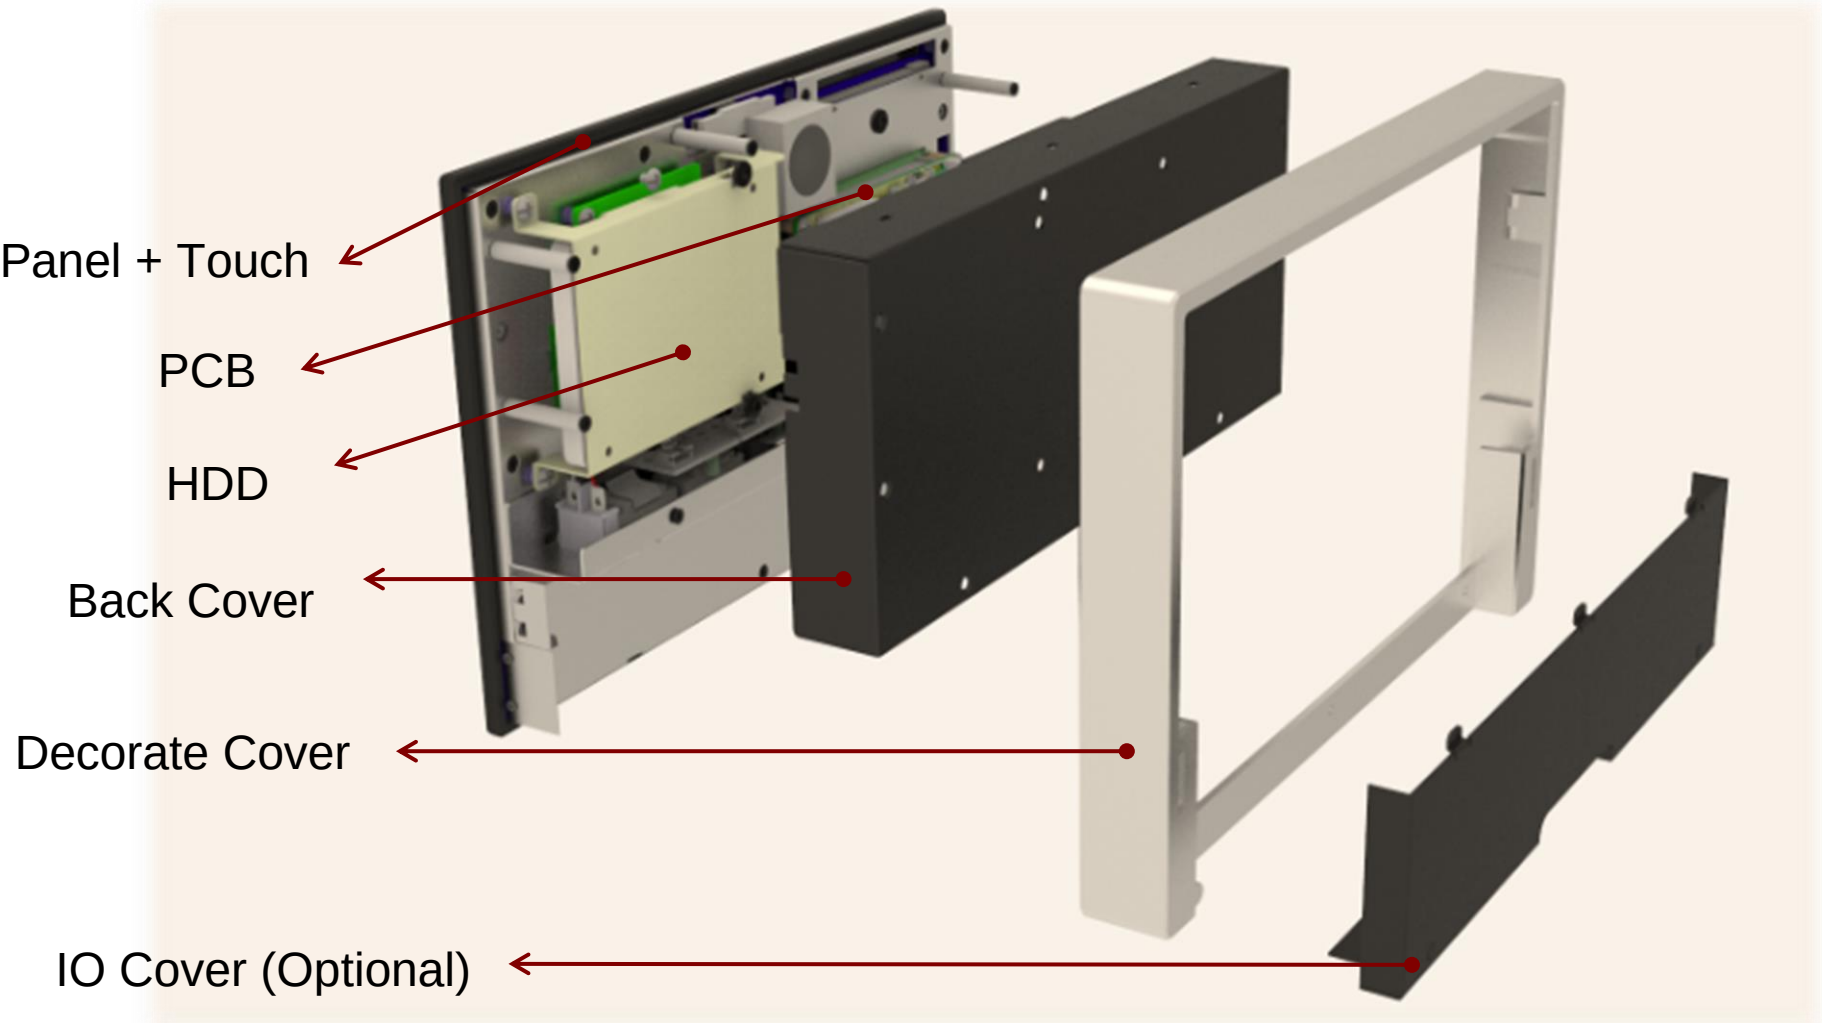

UTC-510 Product Spec.



UTC-510 Series

Features

- Low Power & Fanless design
- All Flat Touch Panel
- Flexible and detachable plastic frame design for Panel mount applications
- **POE Function (Optional)**

Size

10.1"

Housing

Aluminum

Thermal



Fanless

CPU

Baytrail Atom E3825

	UTC-510x
Dimension (L x H x D)	265.4x 182.4 x 39.55 mm
Computing	D: Atom E3825 (BayTrail) Z: Atom E3825 (BayTrail) <u>w/POE (optional)</u>
Touch	P rojected Cap. Multiple Touch G lass (no touch function)
LCD	10.1" TFT LED backlight 1280 x 800
Peripheral (Option)	MSR / RFID / Barcode scanner/ iBeacon
Environmental	0 ~ 40° C (32 ~ 104° F) IP65 Front Panel Protection CE, FCC, UL, CCC, BSMI

UTC-510 Design Feature

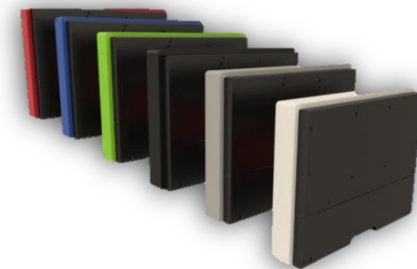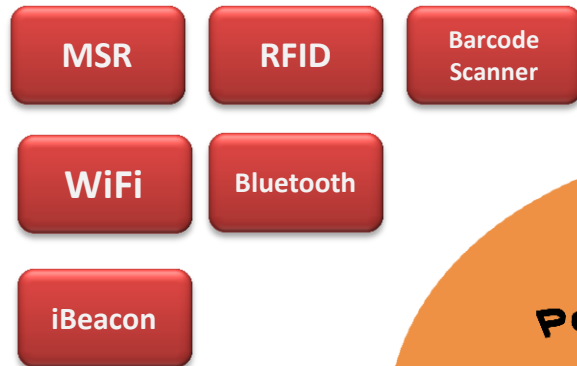

True Flat Projected Capacitive
Multi-Touch / Flat Glass w/o
touch

IP65 dust & water
proof display front



Roadmap – UTC-510

Oct. '15

UTC-510D (Bay Trail)

- 10.1" 16:10 Wide 1280 * 800
- Intel BayTrail E3825 DC 1.33 GHz
- P-Cap Touch Screen
- Fan-less Design/ Front Panel IP65
- Black & Silver Color
- Panel & Wall Mounted VESA 75
- OS: Windows/Linux



Available
Atom E3825 1.33G
Dual-Core



Jan. '16

UTC-510Z (Bay Trail)

- 10.1" 16:10 Wide 1280 * 800
- Intel BayTrail E3825 DC 1.33 GHz
- P-Cap Touch Screen
- POE function (Optional)
- Fan-less Design/ Front Panel IP65
- Black & Silver Color
- Panel & Wall Mounted VESA 75
- OS: Windows/Linux



Available
Atom E3825 1.33G
Dual-Core



Atom E3825
Celeron J1900

Intel 4th Generation Ready

2015 Q4

2016

UTC-510 Products Spec. comparison

Advantech:

UTC-510D/Z



- Dimension: 265***40***182 mm,
- Display & Touch: 1280*800, 16:10, 350nits
- 2(**4**) USB/ 2 COM/ 1(**2**) LAN (**POE**)/ 2W Speaker/ 5M Camera / 2.5'' HDD / mSATA
- Operating Temp: 0~40 Deg.C
- Mounting: Panel, Wall, Stand, VESA 75mm x 75mm



Competitor A



- Dimension: 262***42***181 mm
- Display & Touch: 1280*800, 16:10, 350nits
- 4 USB/ 2 COM/ 2 LAN/ 2 2W Speaker/ 2M Camera / mSATA
- Operating Temp: -10~50 Deg.C
- Mounting: Panel, Wall, Stand, Arm VESA 75mm x 75mm



Competitor B



- Dimension : 263***48***170 mm
- Display & Touch: 1366*768, 16:9, 200nits
- 5 USB/ 3 COM/ 1 LAN/1 VGA/ 2 2W Speaker/ 2M Camera / 2.5'' HDD
- Operating Temp: 0~35 Deg.C
- Mounting: VESA 75mm x 75mm



Thank You.

