


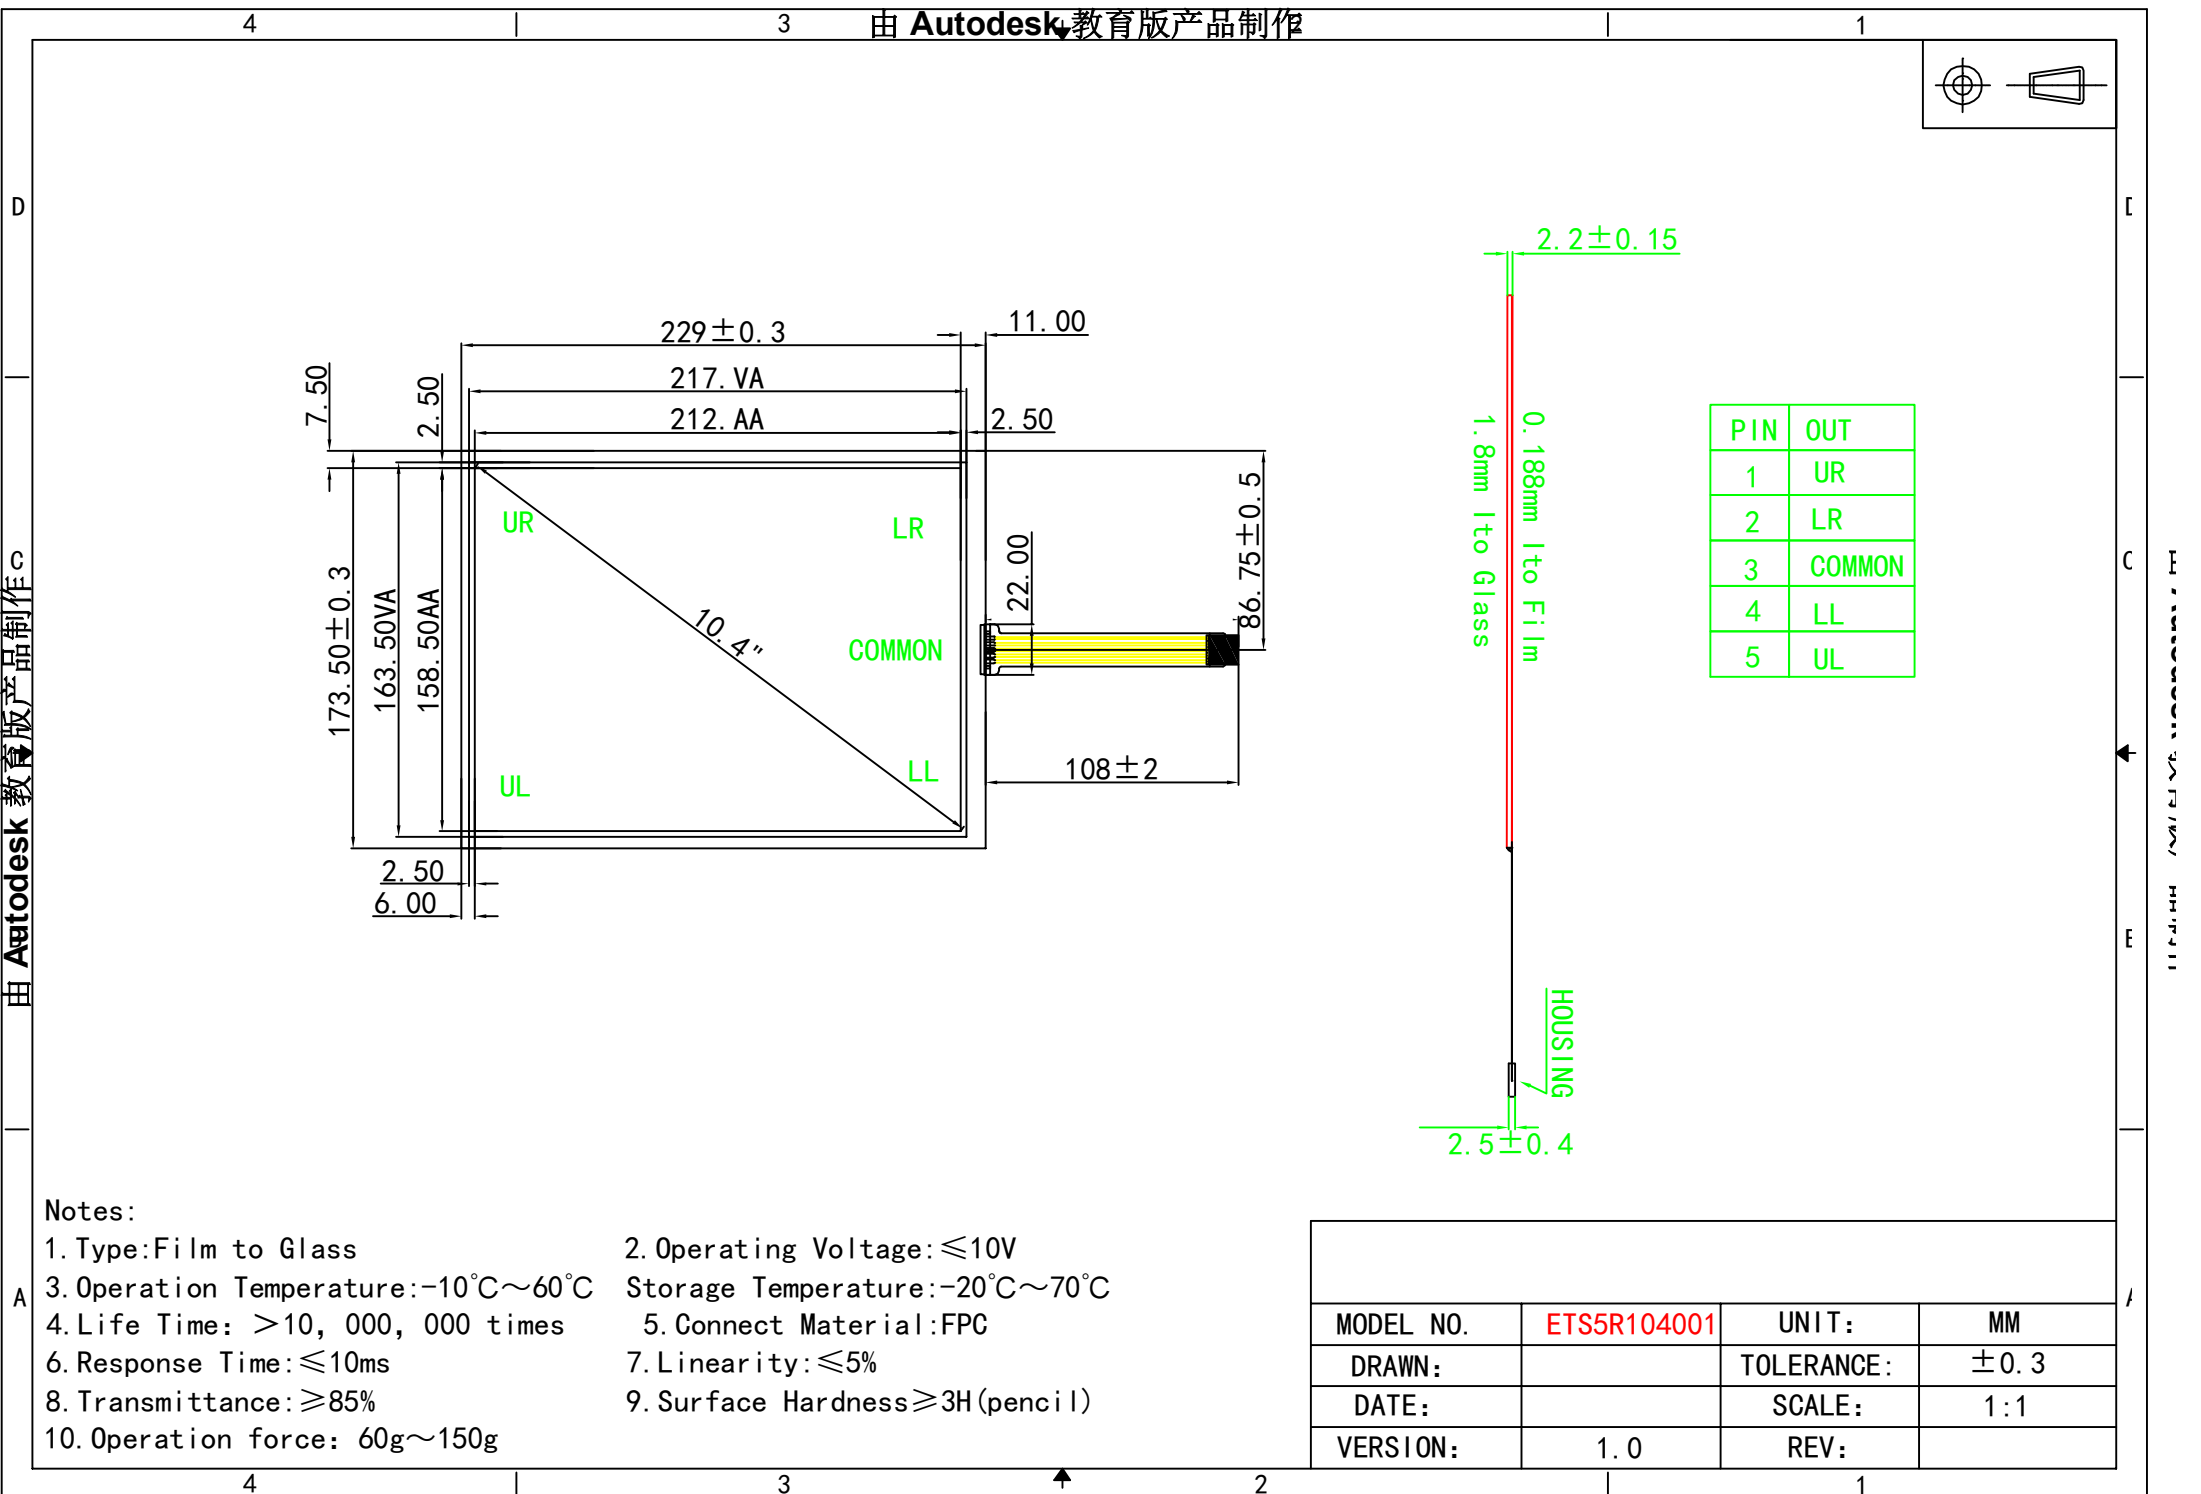

- Notes:
1. Type: Film to Glass

2. Operating Voltage: $\leq 10V$

3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$

4. Life Time: $> 10,000,000$ times

5. Connect Material: FPC

6. Response Time: $\leq 10ms$

7. Linearity: $\leq 5\%$

8. Transmittance: $\geq 85\%$

9. Surface Hardness $\geq 3H$ (pencil)

10. Operation force: $60g \sim 150g$

MODEL NO.	ETS5R104001	UNIT:	MM
DRAWN:		TOLERANCE:	± 0.3
DATE:		SCALE:	1:1
VERSION:	1.0	REV:	